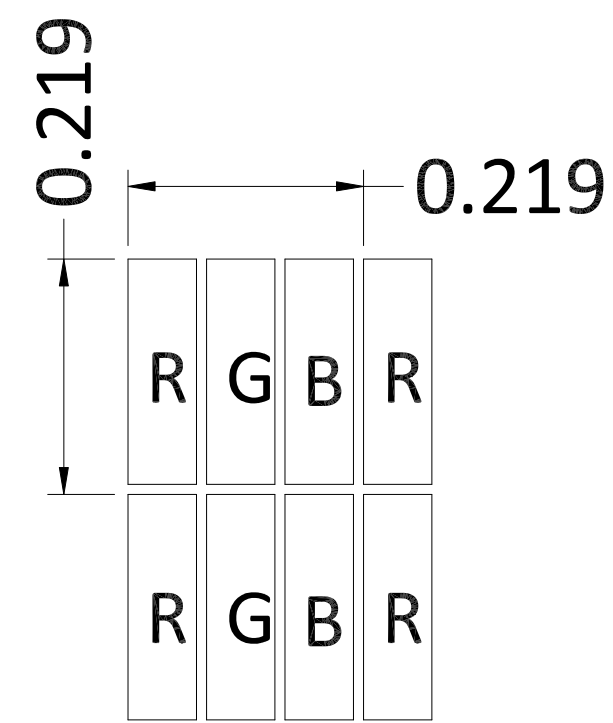
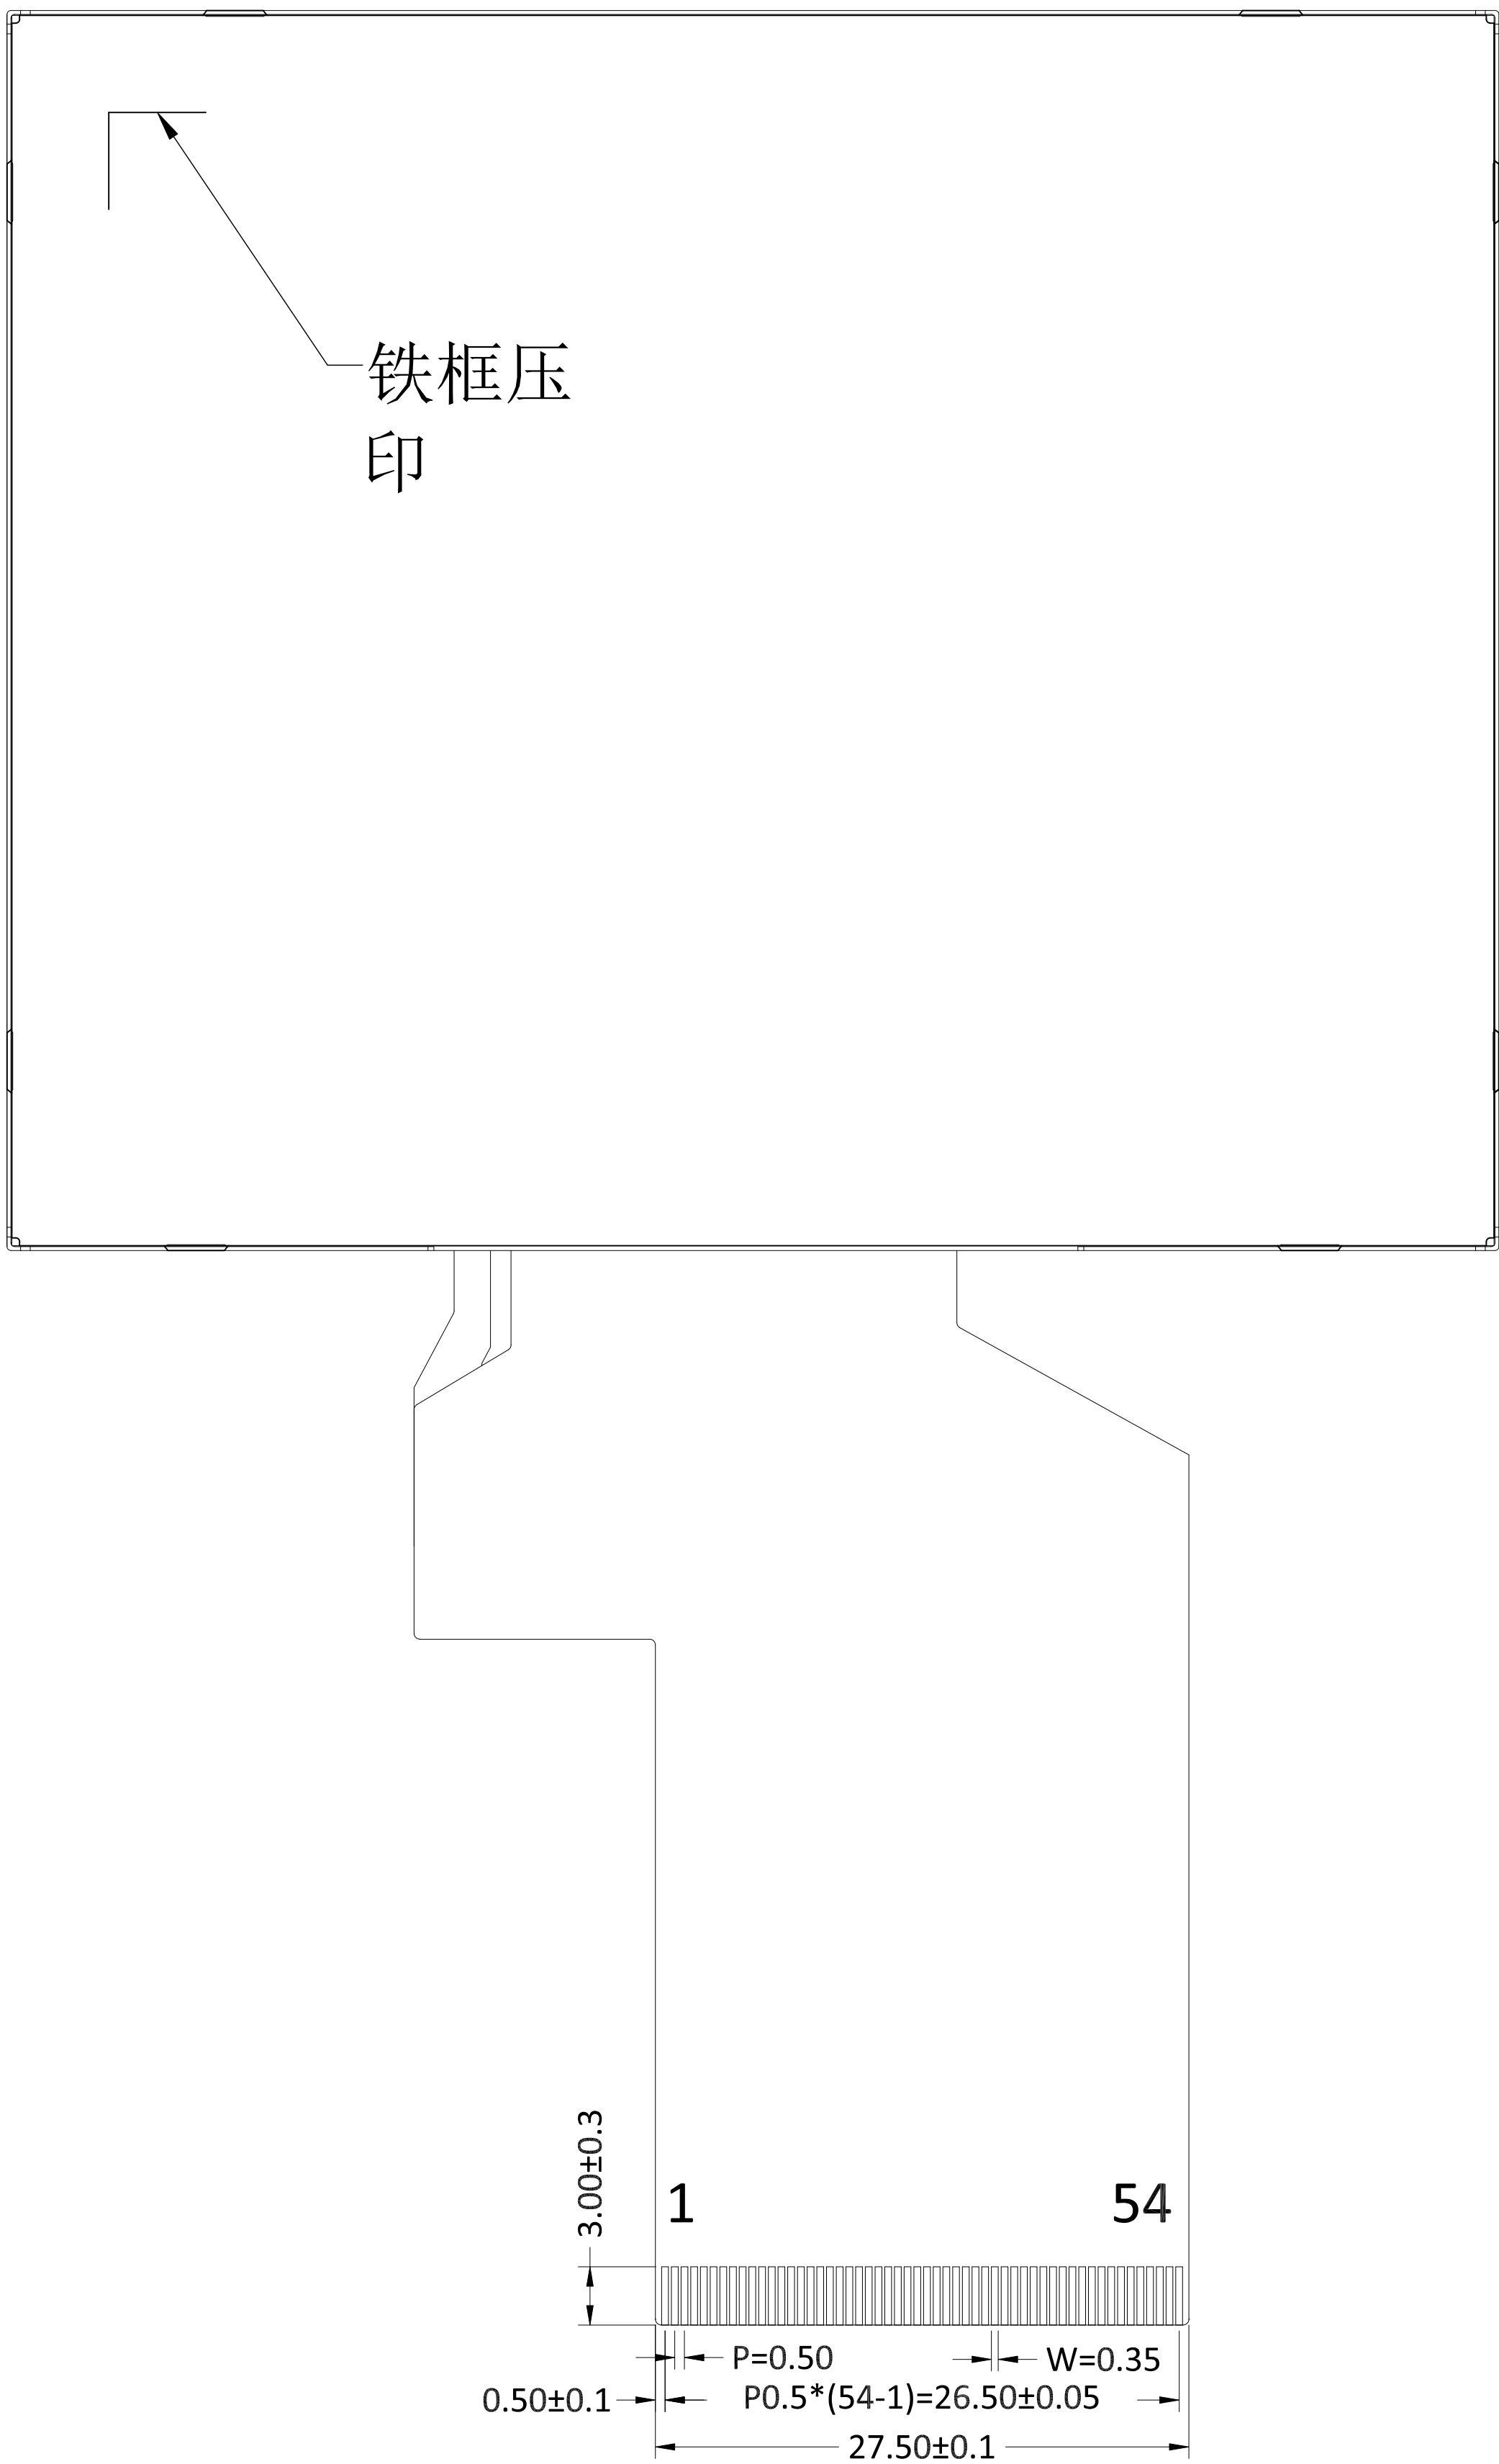
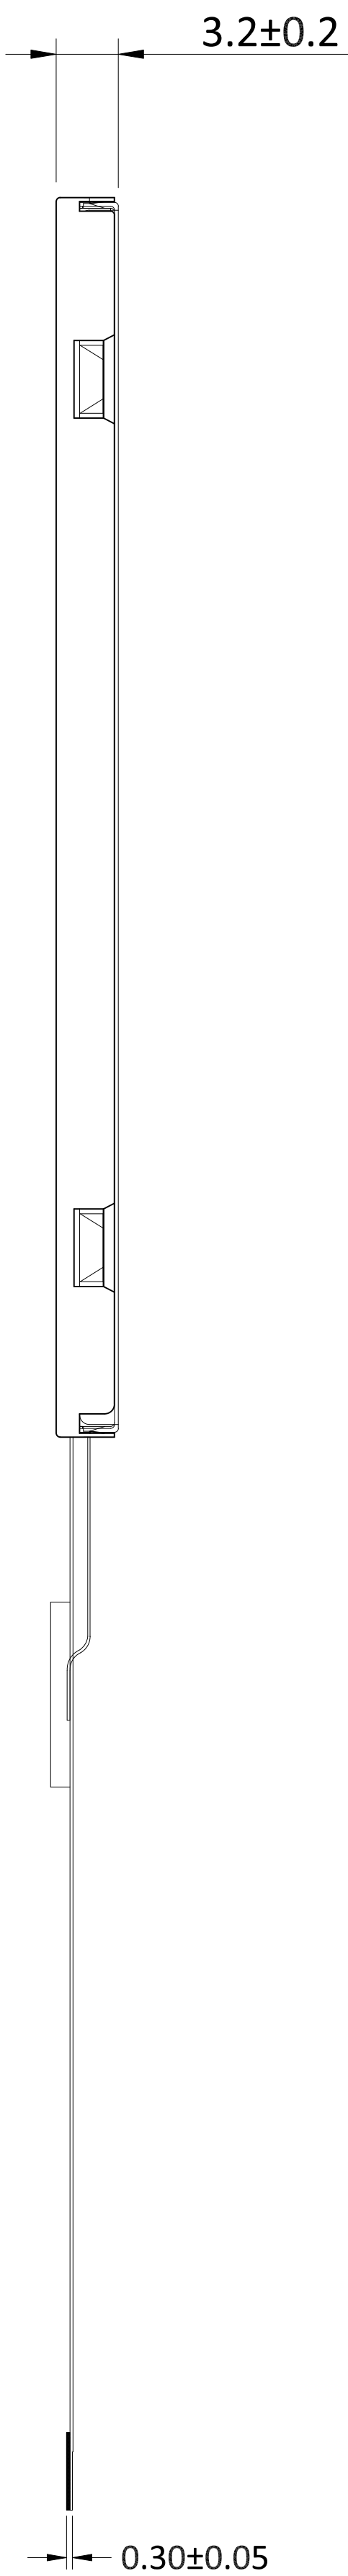
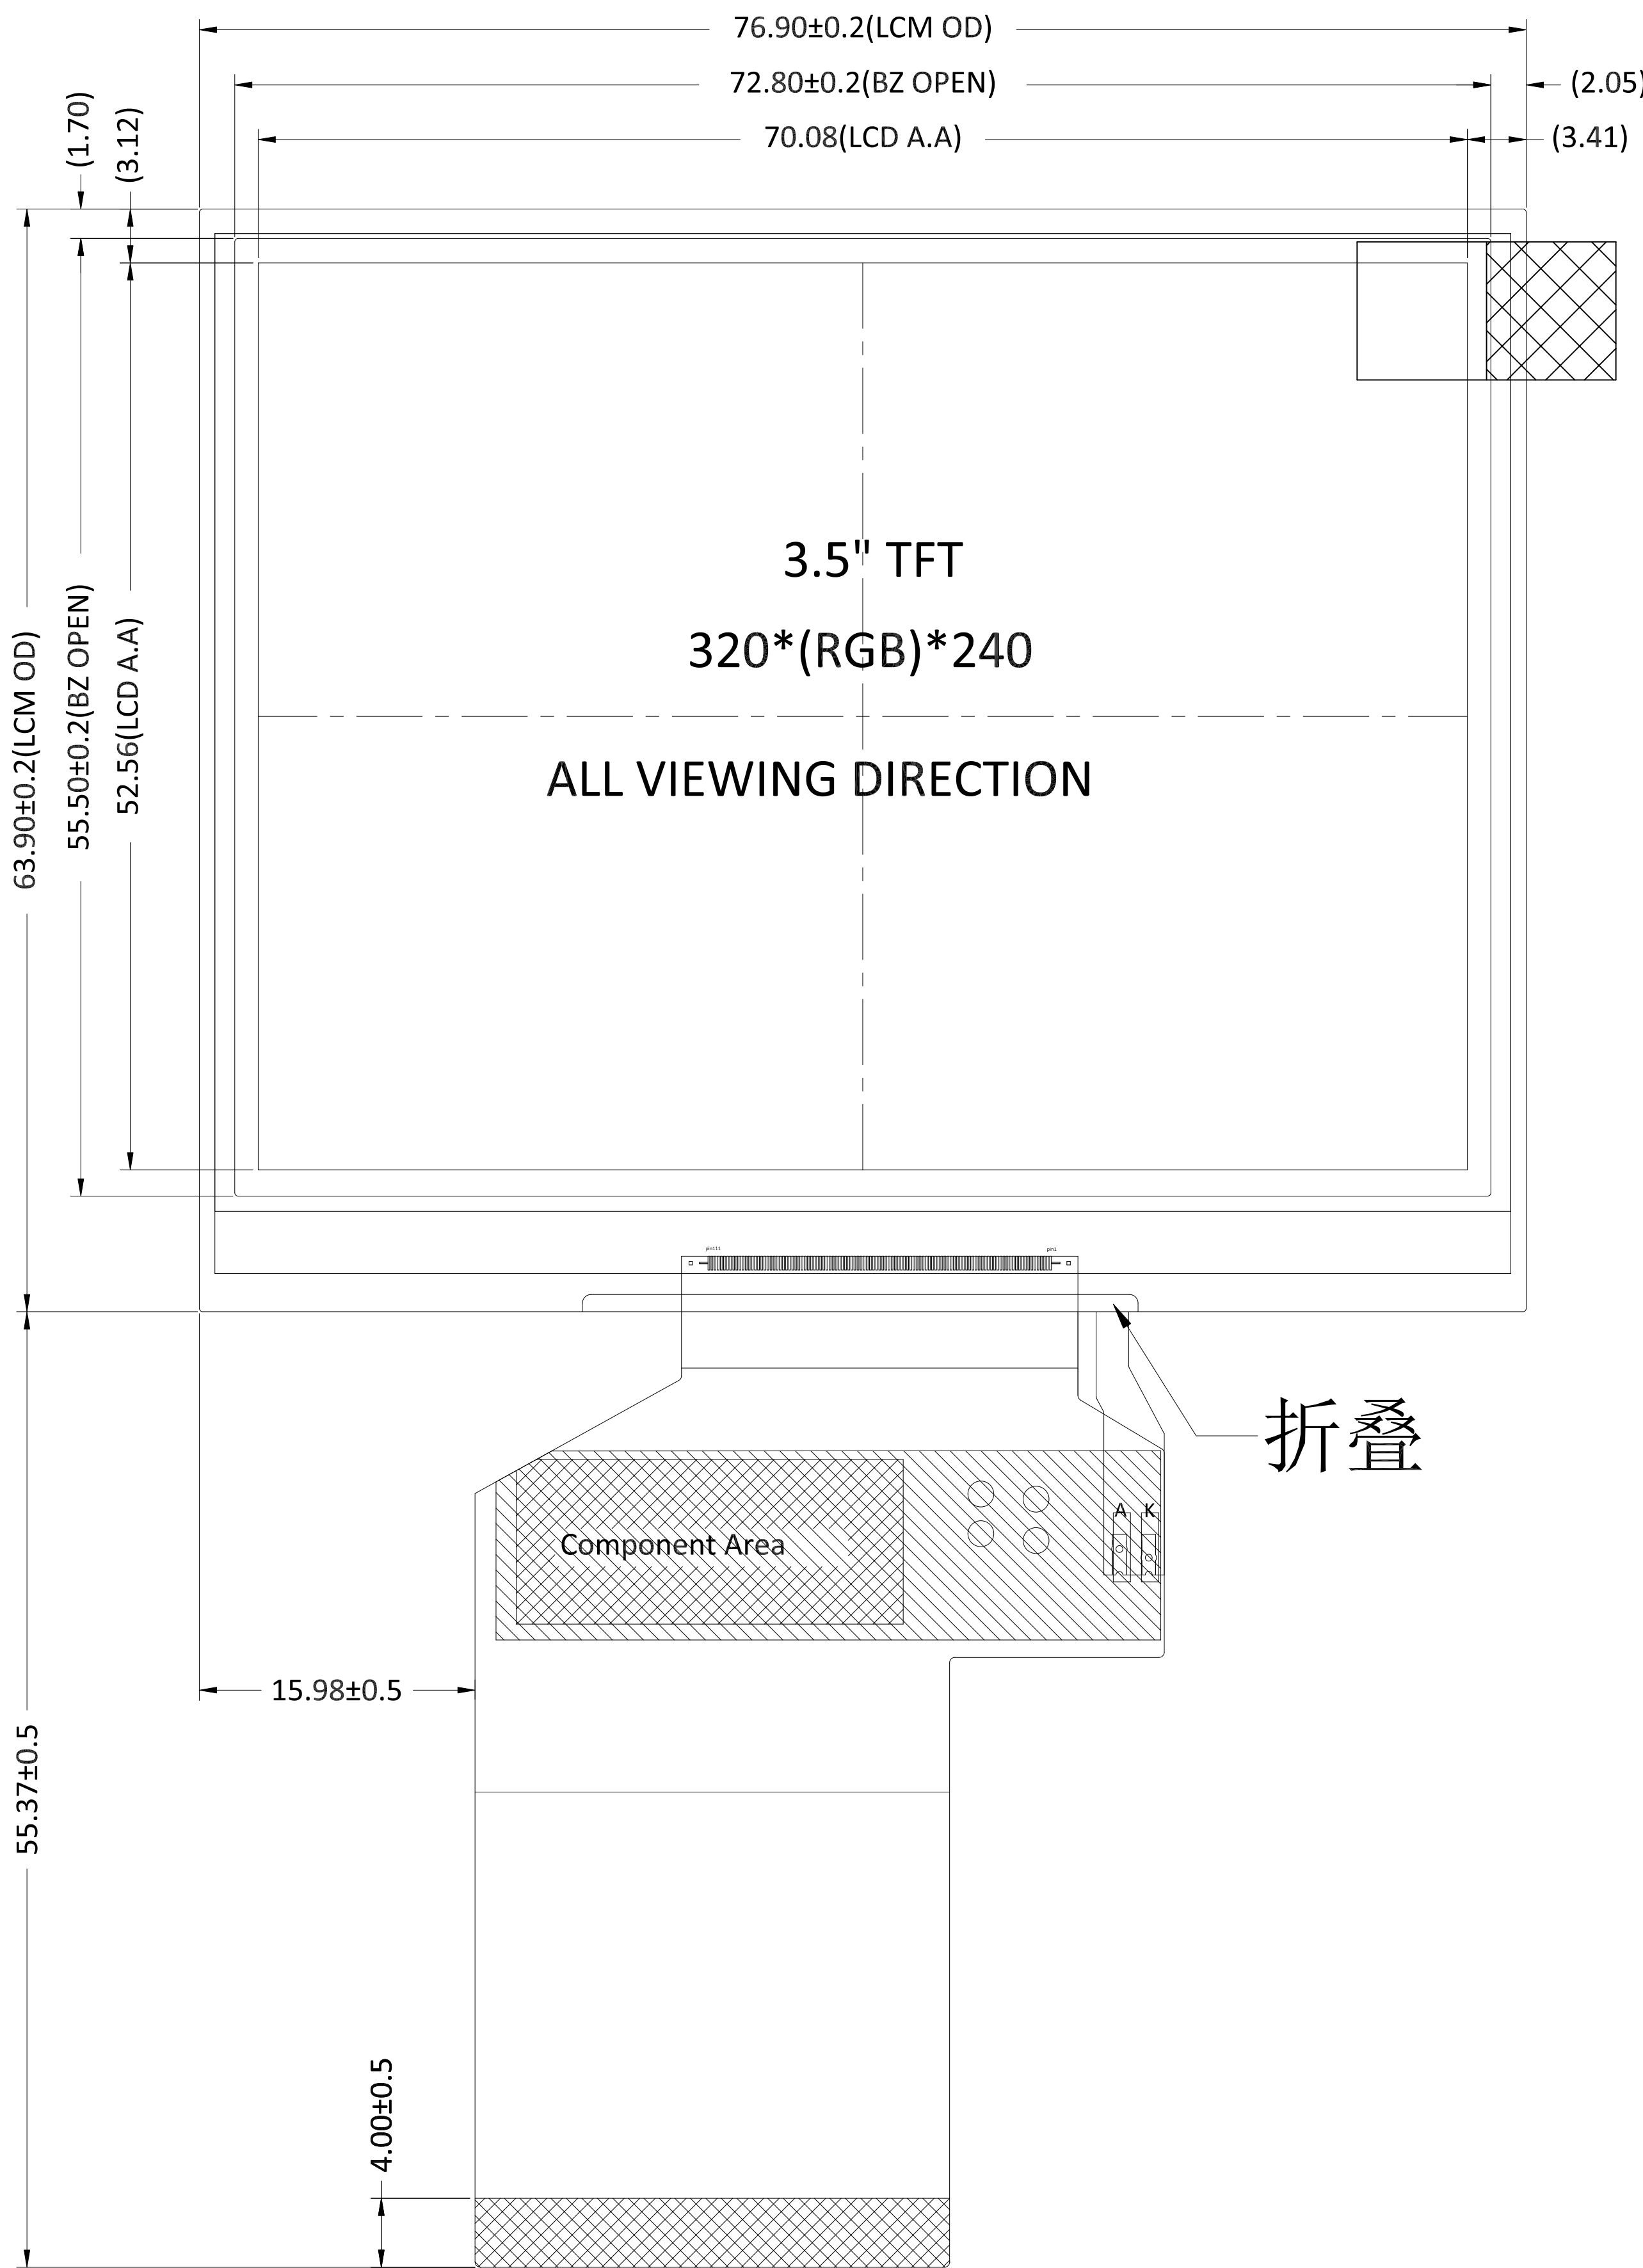


- NOTES:
- General Tolerance:±0.2
 - () reference dimension.
 - Recommended case open area should be less than module V.A
 - Recommended cushion adherent area: TP V.A+1.6mm
 - RoHS must be compliant.

PIN DESCRIPTION

1	LEDK	29	R1
2	LEDK	30	R2
3	LEDA	31	R3
4	LEDA	32	R4
5	NC	33	R5
6	NC	34	R6
7	NC	35	R7
8	RESET	36	HSYNC
9	SPENA	37	VSYNC
10	SPCLK	38	DCLK
11	SPDAT	39	NC
12	B0	40	NC
13	B1	41	VDD
14	B2	42	VDD
15	B3	43	NC
16	B4	44	NC
17	B5	45	NC
18	B6	46	NC
19	B7	47	NC
20	G0	48	NC
21	G1	49	NC
22	G2	50	NC
23	G3	51	NC
24	G4	52	DEN
25	G5	53	GND
26	G6	54	GND
27	G7		
28	R0		

Display Type	TFT,NORMALLY BLACK
Optimum Viewing Direction	TRANSMISSIVE,POSITIVE
Top Polarizer Type	ALL
LCD Driver IC	Anti-Glare
Operating Voltage	ST7272A
Operation Temperature	VDD=3.3V
Storage Temperature	-30°C TO 85°C
Interface	-30°C TO 85°C
Backlight Driver Voltage	24BIT - RGB+SPI
BL Surface luminance	6-LED White
White X/Y	550cd/m2(typ.)
	TBD.

					DRAWN		TITLE	DRAWING NO.			
					ME.CHECKED			LM035HQ10HS			
					EE.CHECKED			UNIT	mm	SCALE	FIT
					APPROVED			3rd Angle		SHEET 08	1
V00		First issue		2018.06.07A	CUSTOMER'S APPROVAL			深圳市美显实业有限公司			
VER.	SYMBOL	AMENDMENT	SIGN	DATE				LCD Mall Limited			